



ALSO
AVAILABLE IN
BULK BAGS

JUST ADD WATER



20
kg

PROSTRENGTH® EXTRA STRENGTH CONCRETE MIX

50
MPa*

Twice the strength of normal concrete mixes
Ideal for more demanding projects
Convenient & easy to use
Australian made concrete blend

MADE
Right Here

**CEMENT
AUSTRALIA®**



POSTS



UPRIGHTS



CONCRETE
REPAIRS



CLOTHES
LINES

plus other 'extra
strength' applications

PROSTRENGTH® EXTRA STRENGTH CONCRETE MIX

When mixed to directions and cured adequately, the product is capable of:

- ✓ **Twice the strength** of standard Concrete Mix
- ✓ **Faster Strength Gain** – perfect for drilling earlier or walking on it the next day
- ✓ **Greater durability** and resistance to wear
- ✓ **Reduced concrete permeability** and a smoother surface finish



Quality
ISO 9001
SAIGLOBAL

MADE
Right Here

**CEMENT
AUSTRALIA®**



A rich blend of cement with aggregate and sand, designed for use in projects with difficult accessibility and where a higher strength of concrete is required.




PROStrength® Extra Strength Concrete Mix is technically superior, with twice the strength of a standard concrete mix; making it the obvious choice for more demanding projects around the garden or home. Some of the more common uses are:

- ✓ Slabs
- ✓ Paths
- ✓ Footings
- ✓ Landscaping
- ✓ Concrete repairs
- ✓ Fencing
- ✓ Post Holes
- ✓ Clotheslines
- ✓ Swings
- ✓ Uprights for pergolas, playgrounds and decks
- ✓ Gate posts
- ✓ Flag Poles
- ✓ Automatic Gate Posts
- ✓ Bollards

Early Strength Development

The Chart Below indicates the suitability of this product for building structures such as pergolas and patios where the footings can be poured one day and work begun the following day with confidence.

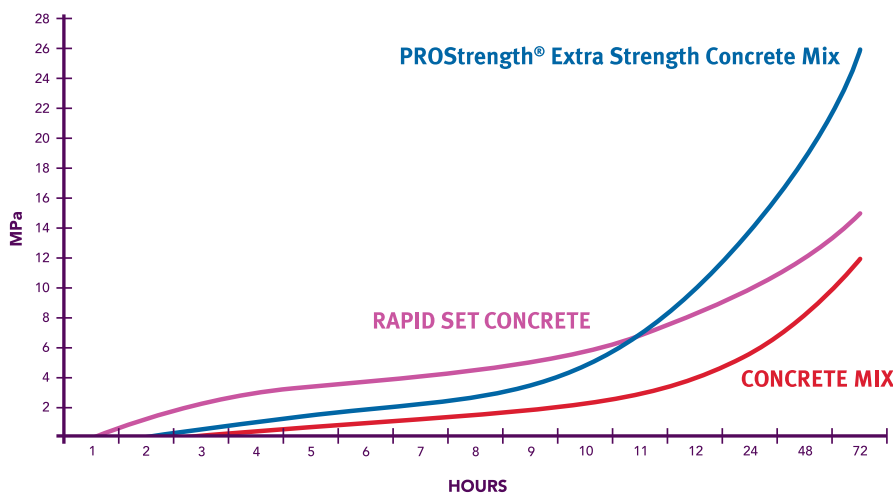

PROStrength® Extra Strength Concrete Mix

Standard Concrete Mix

Typical Structural Use

MPa (compressive strength) 0 10 20 32 40 50 60 70 80 90


Coverage:

Approximately 110 x 20kg bags are required per cubic metre.

Limitations:

- If considering using PROStrength® Extra Strength Concrete Mix with aluminium posts or poles, Cement Australia recommends you confirm the suitability of this with the aluminium manufacturer/supplier prior to use.
- Set times are affected by (extreme) temperatures. Avoid mixing and placing concrete at below 5°C or above 35°C.
- Too much water ruins good concrete.

PROStrength® Extra Strength Concrete Mix COMPRESSIVE STRENGTH GROWTH

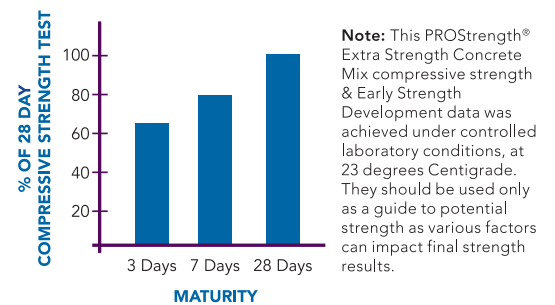

Note: This PROStrength® Extra Strength Concrete Mix compressive strength & Early Strength Development data was achieved under controlled laboratory conditions, at 23 degrees Centigrade. They should be used only as a guide to potential strength as various factors can impact final strength results.

Item Code 17254
Cement Australia
PROStrength Extra
Strength Concrete 20kg



Product Disclaimer

Recommendations regarding the use of this product are to be taken as a guide only. If in doubt contact Cement Australia Pty Limited ("Cement Australia") or seek professional advice. To the extent permitted by law, Cement Australia excludes all implied warranties, conditions and guarantees imposed by legislation. Cement Australia excludes all liability for loss, damage or injury arising from use of the product (i) otherwise than in accordance with the recommendations or (ii) for purposes other than those for which it is ordinarily acquired. For all other loss, damage or injury arising from the use of this product, to the extent permitted by law Cement Australia's liability is limited, at its discretion, to refunding the cost of the product or resupplying the product or equivalent product.

